

## Ambient Conditions

Temperature	-25 ... 70°C / -13 ... 158°F Derating above 40°C required
Humidity	max. 95% r.H. (non condensing)
Ingress Protection	IP20

## Safety Instructions

Installation must be carried out by a qualified electrician in accordance with the applicable regulations.

This device is free of maintenance and must only be cleaned with a dry cloth.

V230525

**Loxone  
Electronics GmbH**  
Smart Home 1  
4154 Kollerschlag  
Austria

**Loxone UK**  
The Forum  
Station Road  
Theale, RG7 4RA  
United Kingdom



For additional information,  
declaration of conformity, visit  
[www.loxone.com/datasheets](http://www.loxone.com/datasheets)

# Power Supply 4.2A

Need Help?  
[loxone.com/support](http://loxone.com/support)



Part No.: 100617

# LOXONE

## About the product

The Loxone Power Supply 4.2A offers an optimal size-to-performance ratio, allowing for space-saving integration. It provides a stable 24V DC output for Loxone systems and is mounted on a DIN rail. The integrated overload and short-circuit protection ensure reliable and safe operation.

## Features

- Small form factor
- Voltage adjustable
- Overload & Short protection
- Silent operation


## AC Input \*

Nominal voltage	120 ... 240VAC, 50 ... 60Hz
Input current	0.95A
Inrush current	typ. 80A
Efficiency	typ. 93%
Power consumption no load	typ. 250mW
Power factor	typ. 0.55





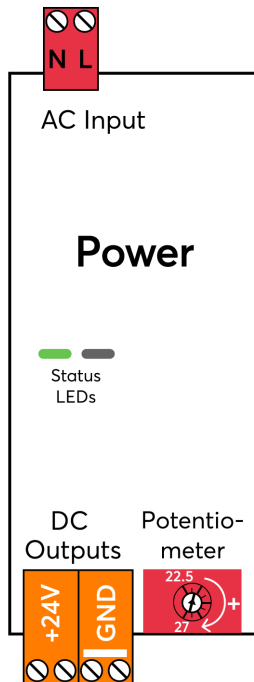

## DC Outputs \*

Nominal voltage	22.5 ... 27VDC (+/- 7%)
Nominal current	4.2A @ 240VAC 2.5A @ 120VAC
Response to output short circuit	Automatic restarts

\*Unless otherwise specified, all values refer to nominal conditions (AC 230V 50Hz input, DC 24V 4.2A output).



## Signalling

-   DC OK
-   Internal Failure
-   Overpower/Overload Protection

## Connecting Terminals

### AC Input

Wire cross-section	0.25 ... 2.5mm <sup>2</sup> / AWG30 ... 12
Stripping length	7mm / 0.28"
Torque of terminal blocks	0.5Nm / 0.37 lbf ft
Temperature resistance	-40 ... 115°C / -40 ... 239°F

### DC Outputs

Wire cross-section	0.25 ... 2.5mm <sup>2</sup> / AWG28 ... 12
Stripping length	7mm / 0.28"
Torque of terminal blocks	0.5Nm / 0.37 lbf ft
Temperature resistance	-40 ... 120°C / -40 ... 248°F